


Item no. DD098-5020MW9027

Series Name: Φ 150 Spark




■ Direct Horizontal Illuminance DD098-5020MW9027

Beam Angle	Vertical Illuminance (lx)
20°	58220
21°	14550
	6470
	3640
	2330
	1620
	1190
	910

Luminous flux : 4650 lm

Installation	Recessed mount
Type	
Fixture wattage	48.5W
Beam angle	20 deg
Color Temp.	2700K
CRI	Ra>90
Luminous	4652 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE, CCC
Cut Hole	150mm

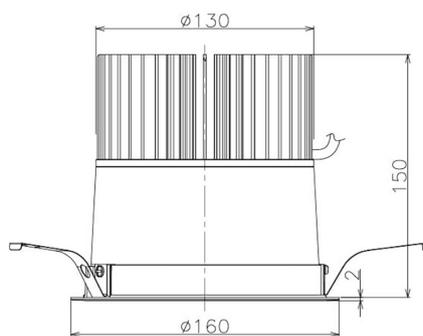

Height (Weight)	
65.3W	152 (1.5kg)
48.5W	152 (1.5kg)
44.3W	132 (1.3kg)
33.8W	132 (1.3kg)
30.3W	132 (1.3kg)
23.0W	102 (1.0kg)

