


Item no. DD098-6530MB8530D

Series Name: Φ150 Spark (Deep Cone)



|                  |                         |
|------------------|-------------------------|
| Installation     | Recessed mount          |
| Type             | Φ150 Spark (Deep Cone)  |
| Fixture wattage  | 65.3W                   |
| Beam angle       | 41 deg                  |
| Color Temp.      | 3000K                   |
| CRI              | Ra>85                   |
| Luminous         | 6255 lm                 |
| Body             | Die-cast aluminum alloy |
| Body finish      | N/A                     |
| Trim finish      | Black                   |
| Reflector finish | Mirror                  |
| IP Rate          | IP20                    |
| Light source     | COB module              |
| Input Voltage    | AC220~240V              |
| Dimming Type     | Non-Dimmable            |
| Certificate      | CE, CCC                 |
| Cut Hole         | 150mm                   |

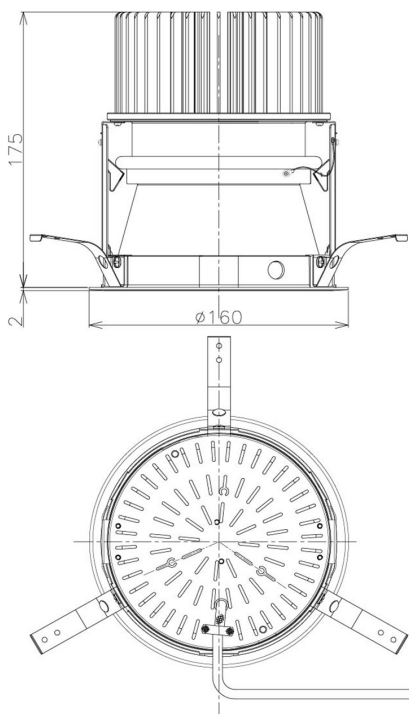

| Height<br>(Weight) | Spot / Medium /<br>Medium flood | Wide<br>flood |
|--------------------|---------------------------------|---------------|
| 65.3W              | 177 (1.4kg)                     |               |
| 48.5W              | 177 (1.5kg)                     |               |
| 44.3W              | 157 (1.2kg)                     |               |
| 33.8W              | 168 (1.1kg)                     | 157 (1.1kg)   |
| 30.3W              | 168 (1.1kg)                     | 157 (1.1kg)   |
| 23.0W              | 138 (0.9kg)                     | 127 (0.9kg)   |

