


Item no. DD051-4235WW8040-DP

Series Name:




■ Lighting Distribution Curve (cd/1000 lm)



■ Direct Horizontal Illuminance DD051-4235WW8040-DP

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
A-A' 45°	55°	20250
B-B' 30°	35°	5060
1		10000
		5000
2		2000
		1270
3		1000
		810
		560
		410
m	0	320

Installation	Recessed mount
Type	
Fixture wattage	42.8W
Beam angle	55 x 35 deg.
Color Temp.	4000K
CRI	Ra>80
Luminous	3039 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	N/A
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE, CCC
Cut Hole	150mm

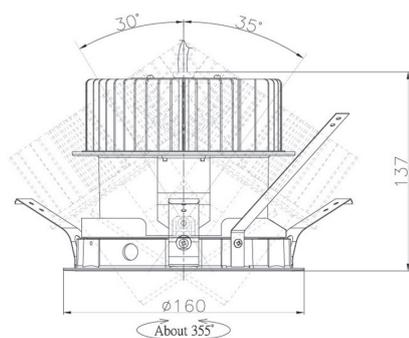

Height (Weight)	Wide flood
78.7W	157 (1.8kg)
58.5W	157 (1.8kg)
55.0W	157 (1.8kg)
42.8W	137 (1.5kg)
36.0W	137 (1.5kg)

