


Item no. DD068-4250WW8030D-AS


Series Name: Asymmetric



■ Direct Horizontal Illuminance DD068-4250WW8030D-AS

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
A-A' 69°	81°	6640
B-B' 46°	60°	1660
1	2000	740
2	1000	410
3	500	270
	200	180
	100	140
m	1 0 1 2	100

Installation	Recessed mount
Type	
Fixture wattage	42.8W
Beam angle	80 x 64 deg.
Color Temp.	3000K
CRI	Ra>80
Luminous	2966 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	White
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE, CCC
Cut Hole	150mm

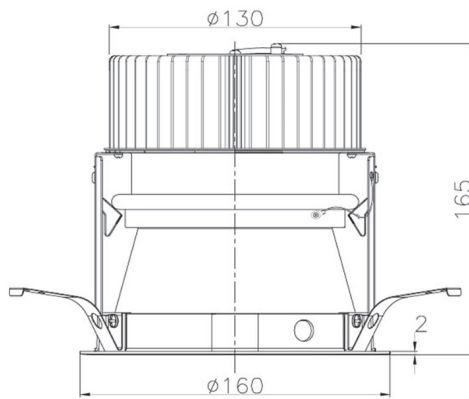

Height (Weight)	Wide flood
78.7W	177 (1.4kg)
58.5W	177 (1.4kg)
55.0W	177 (1.4kg)
42.8W	157 (1.1kg)
36.0W	157 (1.1kg)

