


Item no. DD068-5550MW8030D-AS

Series Name: Asymmetric




Installation	Recessed mount
Type	
Fixture wattage	55W
Beam angle	85 x 65 deg.
Color Temp.	3000K
CRI	Ra>80
Luminous	4410 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE, CCC
Cut Hole	150mm



■ Direct Horizontal Illuminance DD068-5550MW8030D-AS

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
A-A' 65°	85°	11950
B-B' 55°	65°	2990
1		1330
2		750
3		480
		330
		240
m	1 0 1 2	190

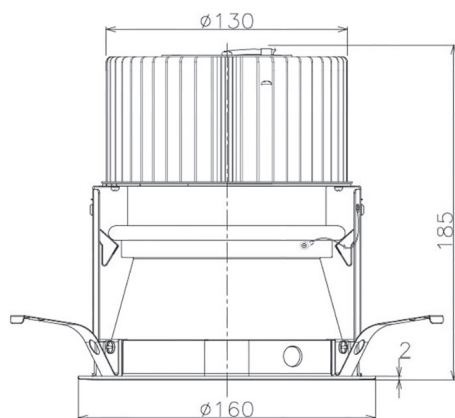

Height (Weight)	Wide flood
78.7W	177 (1.4kg)
58.5W	177 (1.4kg)
55.0W	177 (1.4kg)
42.8W	157 (1.1kg)
36.0W	157 (1.1kg)

