


Item no. DD068-5550MW9040D-AS


Series Name: Asymmetric



■ Direct Horizontal Illuminance DD068-5550MW9040D-AS

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)	
A-A' 65°	85°	10520	
B-B' 55°	65°	2630	
1	5000	1170	
2	2000	660	
3	1000	420	
	500	290	
		210	
m	1	2	160

Installation	Recessed mount
Type	Asymmetric
Fixture wattage	55W
Beam angle	85 x 65 deg.
Color Temp.	4000K
CRI	Ra>90
Luminous	3882 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE, CCC
Cut Hole	150mm

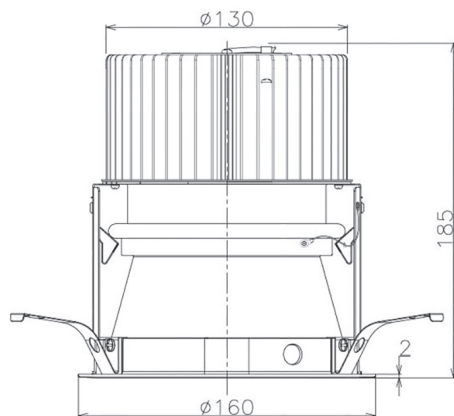

Height (Weight)	Wide flood
78.7W	177 (1.4kg)
58.5W	177 (1.4kg)
55.0W	177 (1.4kg)
42.8W	157 (1.1kg)
36.0W	157 (1.1kg)

