


Item no. DD068-6550WW8030D-AS

Series Name: Asymmetric




| | |
|------------------|-------------------------|
| Installation | Recessed mount |
| Type | |
| Fixture wattage | 58.5W |
| Beam angle | 80 x 65 deg. |
| Color Temp. | 3000K |
| CRI | Ra>80 |
| Luminous | 4227 lm |
| Body | Die-cast aluminum alloy |
| Body finish | N/A |
| Trim finish | White |
| Reflector finish | White |
| IP Rate | IP20 |
| Light source | COB module |
| Input Voltage | AC220~240V |
| Dimming Type | Non-Dimmable |
| Certificate | CE, CCC |
| Cut Hole | 150mm |



■ Direct Horizontal Illuminance DD068-6550WW8030D-AS

| Illuminance Angle | Beam Angle | Vertical Illuminance (lx) |
|-------------------|------------|---------------------------|
| A-A' 70° | 80° | 9270 |
| B-B' 50° | 60° | 2320 |
| 1 | | 2000 |
| 2 | | 1030 |
| 3 | | 580 |
| | | 370 |
| | | 260 |
| | | 190 |
| m | 1 | 200 |
| | 2 | 140 |

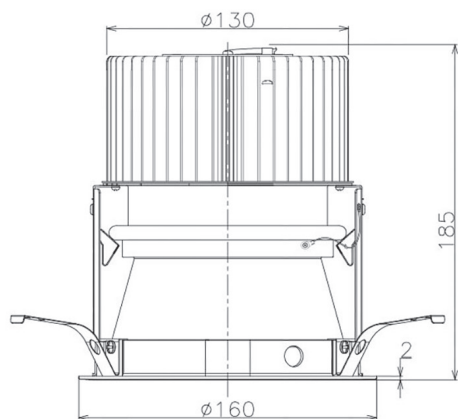

| Height (Weight) | Wide flood |
|-----------------|-------------|
| 78.7W | 177 (1.4kg) |
| 58.5W | 177 (1.4kg) |
| 55.0W | 177 (1.4kg) |
| 42.8W | 157 (1.1kg) |
| 36.0W | 157 (1.1kg) |

