



Item no. DD100-1930MB8530D

Series Name: Φ 100 Spark (Deep Cone)

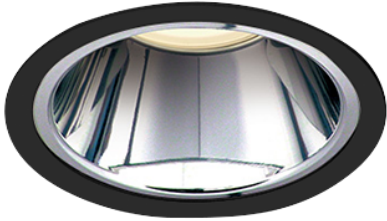

■ Direct Horizontal Illuminance DD100-1930MB8530D

φ	Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
420	24°	25°	22200
1			5550
850			2470
2			1390
1270			890
3			620
1700			450
m	1	0	350

Installation	Recessed mount
Type	Φ 100 Spark (Deep Cone)
Fixture wattage	18.6W
Beam angle	25 deg
Color Temp.	3000K
CRI	Ra>85
Luminous	1550 lm
Body	Dia-cast aluminum
Body finish	N/A
Trim finish	Black
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE, CCC
Cut Hole	100mm

