



Item no. DD100-1930MB8535D

Series Name: Φ 100 Spark (Deep Cone)

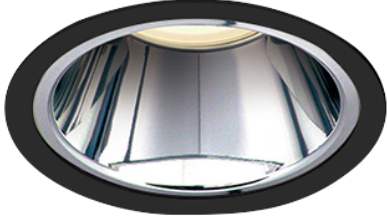

■ Direct Horizontal Illuminance DD100-1930MB8535D

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
24°	1	22640
	2	5660
	3	2520
	4	1420
	5	910
25°	1	630
	2	460
	3	350
	4	260
	5	190

Installation	Recessed mount
Type	Φ 100 Spark (Deep Cone)
Fixture wattage	18.6W
Beam angle	25 deg
Color Temp.	3500K
CRI	Ra>85
Luminous	1581 lm
Body	Dia-cast aluminum
Body finish	N/A
Trim finish	Black
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE, CCC
Cut Hole	100mm

