


Item no. DD105-2520MB9030

Series Name: Φ 100 Lens type Adjustable downlight, Antiglare




■ Direct Horizontal Illuminance DD105-2520MB9030

Illuminance Angle	Beam Angle	Vertical Illuminance(lx)
ϕ 21°	22°	53270
370	1	13320
		5920
740	2	3330
		2130
110	3	1480
		1090
480	m	830

Luminous flux : 2120 lm

Installation	Recessed mount
Type	Φ 100 Lens type Adjustable downlight, Antiglare
Fixture wattage	24.3W
Beam angle	22 deg
Color Temp.	3000K
CRI	Ra>90
Luminous	2120 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	Black
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CCC
Cut Hole	100mm

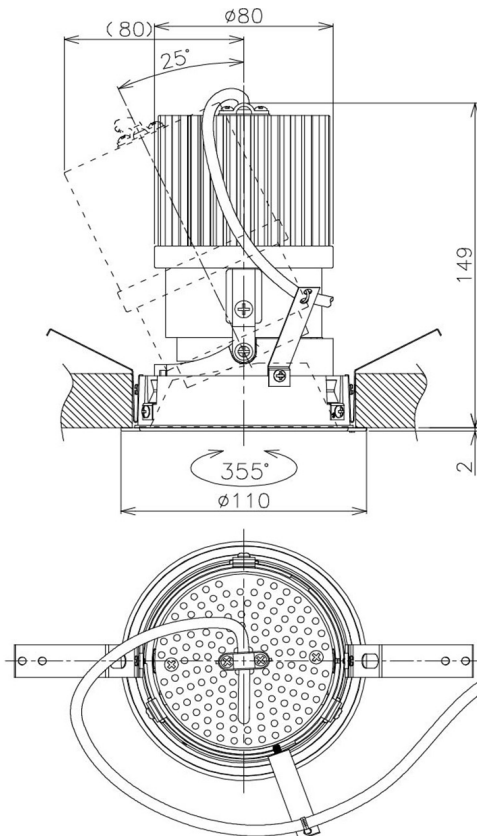

Height (Weight)	
31.8W	152 (0.9kg)
24.3W	152 (0.9kg)
21.0W	115 (0.8kg)
14.0W	115 (0.8kg)

