


Item no. DD105-2520MB9030

Series Name:  $\Phi$ 100 Lens type Adjustable downlight, Antiglare




■ Direct Horizontal Illuminance DD105-2520MB9030

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
$\phi$ 21°	22°	53270
370	1	13320
740	2	5920
110	3	3330
480	m	2130
	1	1480
	0	1090
	1	830
	2	

Luminous flux : 2120 lm

Installation	Recessed mount
Type	
Fixture wattage	24.3W
Beam angle	22 deg
Color Temp.	3000K
CRI	Ra>90
Luminous	2120 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	Black
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CCC
Cut Hole	100mm

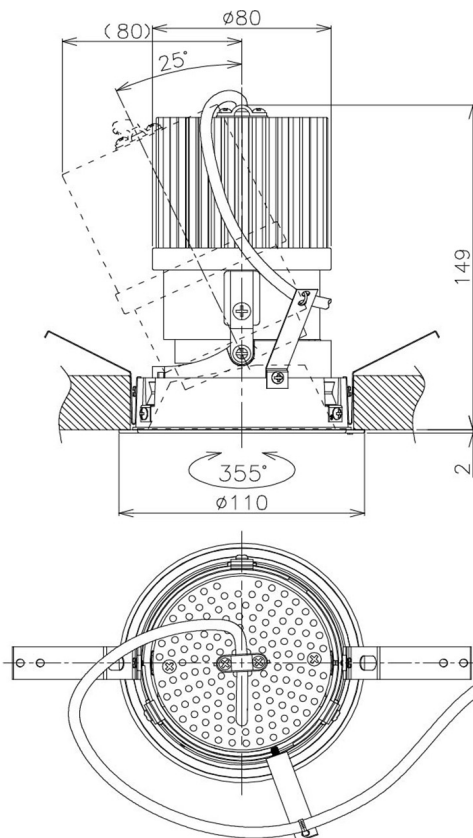

Height (Weight)	
31.8W	152 (0.9kg)
24.3W	152 (0.9kg)
21.0W	115 (0.8kg)
14.0W	115 (0.8kg)