



Item no. DD126-2015B9030-LX

Series Name: Versa L-G (DD126-LX)

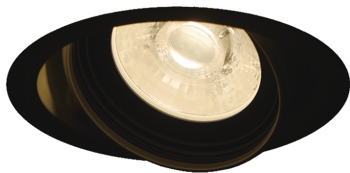

■ Direct Horizontal Illuminance DD126-2015B9030-LX

| φ   | Illuminance Angle | Beam Angle | Vertical Illuminance (lx) |
|-----|-------------------|------------|---------------------------|
| 120 | 12°               | 13°        | 86400                     |
| 210 |                   |            | 21600                     |
| 420 |                   |            | 9600                      |
| 630 |                   |            | 5400                      |
| 840 |                   |            | 3460                      |
|     |                   |            | 2400                      |
|     |                   |            | 1760                      |
|     |                   |            | 1350                      |

|                  |                       |
|------------------|-----------------------|
| Installation     | Recessed mount        |
| Type             | Versa L-G (DD126-LX)  |
| Fixture wattage  | 18.6W                 |
| Beam angle       | 58deg                 |
| Color Temp.      | 3000K                 |
| CRI              | Ra>90                 |
| Luminous         | 1492 lm               |
| Body             | Die-castaluminumalloy |
| Body finish      | N/A                   |
| Trim finish      | Black                 |
| Reflector finish | N/A                   |
| IP Rate          | IP20                  |
| Light source     | COB module            |
| Input Voltage    | AC220~240V            |
| Dimming Type     | Non-Dimmable          |
| Certificate      | CE,CCC                |
| Cut Hole         | 125                   |

