


Item no. DD138-2520MW9040L


Series Name: Φ 150 Spark (Swallow Cone) (DD138L)



■ Direct Horizontal Illuminance DD138-2520MW9040L

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
22°	24°	25780
		6440
		2860
		1610
		1030
		720
		530
		400

Installation	Recessed mount
Type	Φ 150 Spark (Swallow Cone) (DD138L)
Fixture wattage	23W
Beam angle	24deg
Color Temp.	4000K
CRI	Ra>90
Luminous	2983 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE,CCC
Cut Hole	150

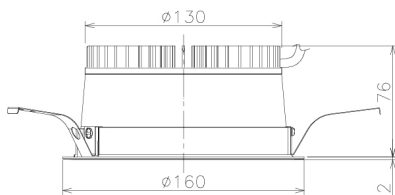

Height (Weight)	
48.5W	125 (1.4kg)
41.0W	106 (1.2kg)
28.0W	106 (1.2kg)
23.0W	76 (0.9kg)
20.0W	76 (0.9kg)

