


Item no. DD138-2820MW9030


Series Name:  $\Phi$ 150 Spark (DD138)



■ Direct Horizontal Illuminance DD138-2820MW9030

φ	Illuminance Angle		Vertical Illuminance (lx)
	19°	20°	
330	20000	10000	48480
660	10000	5000	12120
1000	5000	2000	5390
1330	2000	1000	3030
			1940
			1350
			990
			760

Installation	Recessed mount
Type	$\Phi$ 150 Spark (DD138)
Fixture wattage	28W
Beam angle	20deg
Color Temp.	3000K
CRI	Ra>90
Luminous	3308 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE,CCC
Cut Hole	150

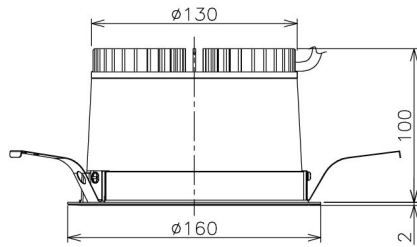

Height (Weight)	
48.5W	130 (1.3kg)
41.0W	130 (1.3kg)
28.0W	130 (1.3kg)
23.0W	100 (1.0kg)
20.0W	100 (1.0kg)

