


Item no. DD138-2820MW9035

Series Name: Φ 150 Spark (DD138)




| | |
|------------------|--------------------------|
| Installation | Recessed mount |
| Type | Φ 150 Spark (DD138) |
| Fixture wattage | 28W |
| Beam angle | 20deg |
| Color Temp. | 3500K |
| CRI | Ra>90 |
| Luminous | 3275 lm |
| Body | Die-castaluminumalloy |
| Body finish | N/A |
| Trim finish | White |
| Reflector finish | Mirror |
| IP Rate | IP20 |
| Light source | COB module |
| Input Voltage | AC220~240V |
| Dimming Type | Non-Dimmable |
| Certificate | CE,CCC |
| Cut Hole | 150 |



■ Direct Horizontal Illuminance DD138-2820MW9035

| Illuminance Angle | Beam Angle | Vertical Illuminance (lx) |
|-------------------|------------|---------------------------|
| 19° | 20° | 48000 |
| | | 12000 |
| | | 5330 |
| | | 3000 |
| | | 1920 |
| 1000 | 3 | 1330 |
| | | 980 |
| | | 750 |
| 1330 | m | 1 |
| | | 2 |

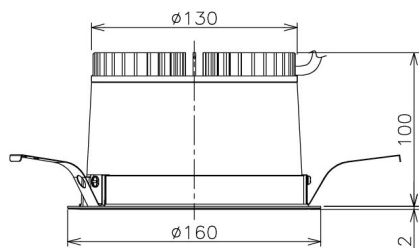

| Height (Weight) | |
|-----------------|-------------|
| 48.5W | 130 (1.3kg) |
| 41.0W | 130 (1.3kg) |
| 28.0W | 130 (1.3kg) |
| 23.0W | 100 (1.0kg) |
| 20.0W | 100 (1.0kg) |

