


Item no. DD138-2520MW9040

Series Name:  $\Phi$ 150 Spark (DD138)




Installation	Recessed mount
Type	$\Phi$ 150 Spark (DD138)
Fixture wattage	23W
Beam angle	20deg
Color Temp.	4000K
CRI	Ra>90
Luminous	2890 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE,CCC
Cut Hole	150



■ Direct Horizontal Illuminance DD138-2520MW9040

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
19°	20°	42360
		10590
		4710
		2650
		1690
		1180
1330	m	860
		660

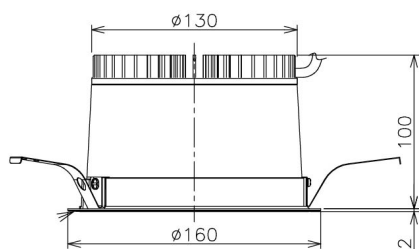

Height (Weight)	
48.5W	130 (1.3kg)
41.0W	130 (1.3kg)
28.0W	130 (1.3kg)
23.0W	100 (1.0kg)
20.0W	100 (1.0kg)

