


Item no. DD098-2530DW9040D

Series Name: Φ 150 Spark (Deep Cone)



White Reflector






■ Direct Horizontal Illuminance DD098-2530DW9040D

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
ϕ 26°	28°	28640
1		7160
460		3180
2		1790
920		1150
3		800
380		580
840		450
m	1 0.1 1 2	

Luminous flux : 1985 lm

Installation	Recessed mount
Type	Φ 150 Spark (Deep Cone)
Fixture wattage	23W
Beam angle	28 deg
Color Temp.	4000K
CRI	Ra>90
Luminous	1985 lm
Body	Die-cast aluminum alloy
Body finish	N/A
Trim finish	White
Reflector finish	White
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE, CCC
Cut Hole	150mm

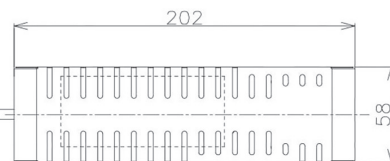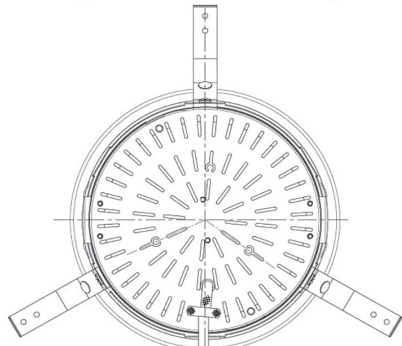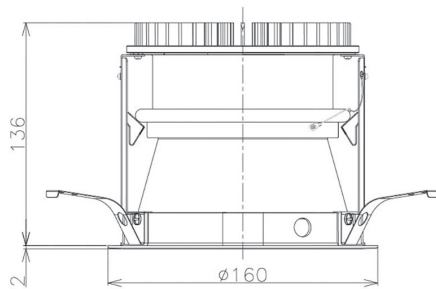

Height (Weight)	Spot / Medium / Medium flood	Wide flood
65.3W	177 (1.4kg)	
48.5W	177 (1.5kg)	
44.3W	157 (1.2kg)	
33.8W	168 (1.1kg)	157 (1.1kg)
30.3W	168 (1.1kg)	157 (1.1kg)
23.0W	138 (0.9kg)	127 (0.9kg)