


Item no. DD138-2020MW9035D


Series Name: Φ 150 Spark (Deep Cone)
(DD138D)



■ Direct Horizontal Illuminance DD138-2020MW9035D

φ	Illuminance Angle	Beam Angle	Vertical Illuminance (lx)	
330	19°	19°	53710	
1			13430	
660			5970	
2			3360	
1000			2150	
3			1490	
1330			1100	
m	1	1 0 0	2	840

Installation	Recessed Mount
Type	Φ 150 Spark (Deep Cone) (DD138D)
Fixture wattage	20W
Beam angle	19 deg
Color Temp.	3500K
CRI	Ra>90
Luminous	2067 lm
Body	Die-castaluminumalloy
Body finish	White
Trim finish	White
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE,CCC
Cut Hole	150

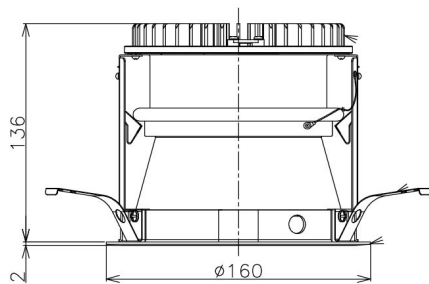

Height (Weight)	Spot / Medium / Medium flood	Wide flood
48.5W	175 (1.4kg)	
41.0W	155 (1.1kg)	
28.0W	166 (1.1kg)	155 (1.1kg)
23.0W	136 (0.9kg)	125 (0.9kg)
20.0W	136 (0.9kg)	125 (0.9kg)

