



Item no. DD138-2820MB9027D





Series Name: Φ 150 Spark (Deep Cone)
(DD138D)

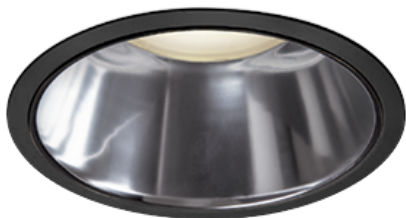

■ Direct Horizontal Illuminance DD138-2820MB9027D

φ	Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
330	19°	19°	73460
330			18370
660			8160
660			4590
1000			2940
1000			2040
1330			1500
1330			1150

Installation	Recessed Mount
Type	Φ 150 Spark (Deep Cone) (DD138D)
Fixture wattage	28W
Beam angle	19 deg
Color Temp.	2700K
CRI	Ra>90
Luminous	3122 lm
Body	Die-cast aluminum alloy
Body finish	Black
Trim finish	Black
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE,CCC
Cut Hole	150

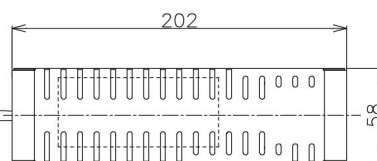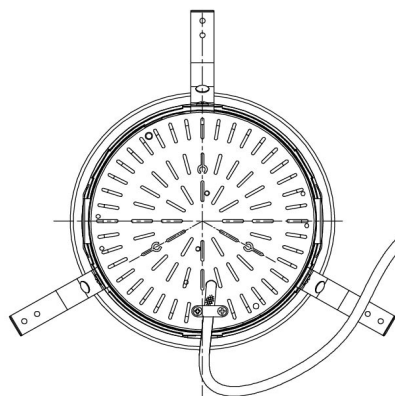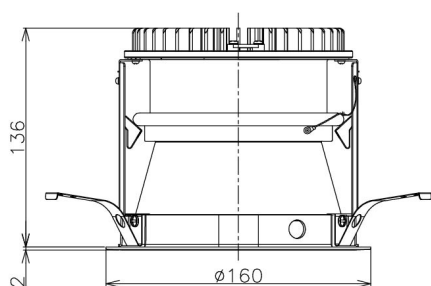

Height (Weight)	Spot / Medium / Medium flood	Wide flood
48.5W	175 (1.4kg)	
41.0W	155 (1.1kg)	
28.0W	166 (1.1kg)	155 (1.1kg)
23.0W	136 (0.9kg)	125 (0.9kg)
20.0W	136 (0.9kg)	125 (0.9kg)