



Item no. DD138-2530MB9030D


Series Name: Φ 150 Spark (Deep Cone)
(DD138D)

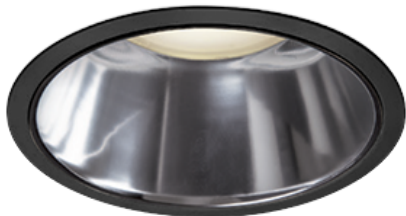

■ Direct Horizontal Illuminance DD138-2530MB9030D

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
26°	28°	39590
		9900
		4400
		2470
		1580
1380	3	1100
		810
		620
1840	m	1
		2

Installation	Recessed Mount
Type	Φ 150 Spark (Deep Cone) (DD138D)
Fixture wattage	23W
Beam angle	26 deg
Color Temp.	3000K
CRI	Ra>90
Luminous	2774 lm
Body	Die-cast aluminum alloy
Body finish	Black
Trim finish	Black
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE,CCC
Cut Hole	150

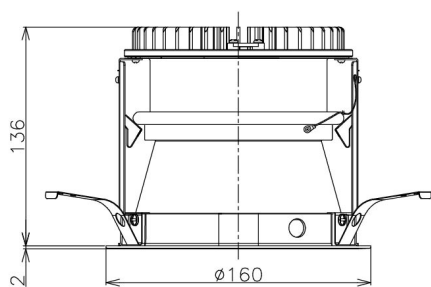

Height (Weight)	Spot / Medium / Medium flood	Wide flood
46.5W	175 (1.4kg)	
41.0W	155 (1.1kg)	
28.0W	166 (1.1kg)	155 (1.1kg)
23.0W	136 (0.9kg)	125 (0.9kg)
20.0W	136 (0.9kg)	125 (0.9kg)

