


Item no. DD138-2020MB9040D

Series Name:  $\Phi$ 150 Spark (Deep Cone)  
(DD138D)




Installation	Recessed Mount
Type	$\Phi$ 150 Spark (Deep Cone) (DD138D)
Fixture wattage	20W
Beam angle	19 deg
Color Temp.	4000K
CRI	Ra>90
Luminous	2096 lm
Body	Die-cast aluminum alloy
Body finish	Black
Trim finish	Black
Reflector finish	Mirror
IP Rate	IP20
Light source	COB module
Input Voltage	AC220~240V
Dimming Type	Non-Dimmable
Certificate	CE,CCC
Cut Hole	150



■ Direct Horizontal Illuminance DD138-2020MB9040D

Beam Angle	Vertical Illuminance (lx)
19°	54470
1°	13620
2°	6050
3°	3400
1000m	2180
1510m	1510
1110m	1110
850m	850

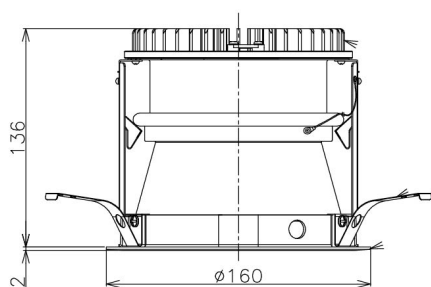

Height (Weight)	Spot / Medium / Medium flood	Wide flood
48.5W	175 (1.4kg)	
41.0W	155 (1.1kg)	
28.0W	166 (1.1kg)	155 (1.1kg)
23.0W	136 (0.9kg)	125 (0.9kg)
20.0W	136 (0.9kg)	125 (0.9kg)

