


Item no. DD138-2520MW9040


Series Name: Cledy spark (Normal cone)
(DD138)



■ Direct Horizontal Illuminance DD138-2520MW9040

| φ | Illuminance Angle | Beam Angle | Vertical Illuminance (lx) |
|------|-------------------|------------|---------------------------|
| 330 | 19° | 20° | 42360 |
| 660 | 1 | | 10590 |
| 1000 | 2 | | 4710 |
| 1330 | 3 | | 2650 |
| | | | 1690 |
| | | | 1180 |
| | | | 860 |
| | | | 660 |

| | | |
|------------------|-------------------------|-------|
| Installation | Recessed mount | |
| Type | High-efficiency | Fixed |
| | downlight Φ150 | |
| Fixture wattage | 23W | |
| Beam angle | 20deg | |
| Color Temp. | 4000K | |
| CRI | Ra>90 | |
| Luminous | 2890 lm | |
| Body | Die-cast aluminum alloy | |
| Body finish | N/A | |
| Trim finish | White | |
| Reflector finish | Mirror | |
| IP Rate | IP20 | |
| Light source | COB module | |
| Input Voltage | AC220~240V | |
| Dimming Type | Non-Dimmable | |
| Certificate | CE,CCC | |
| Cut Hole | 150 | |

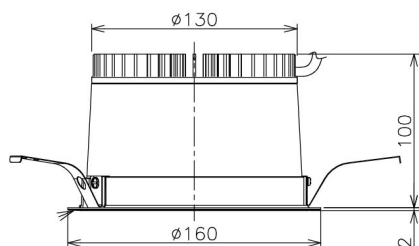

| Height (Weight) | |
|-----------------|-------------|
| 48.5W | 130 (1.3kg) |
| 41.0W | 130 (1.3kg) |
| 28.0W | 130 (1.3kg) |
| 23.0W | 100 (1.0kg) |
| 20.0W | 100 (1.0kg) |

