


Item no. DD138-2520MW9035L


Series Name: Cledy spark (Shallow cone)  
(DD138L)



■ Direct Horizontal Illuminance DD138-2520MW9035L

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)
22°	24°	25410
		6350
380	1	2820
770	2	1590
1160	3	1020
1550	m	710
		520
		400

Installation	Recessed mount	
Type	High-efficiency	Fixed
	downlight $\Phi$ 150	
Fixture wattage	23W	
Beam angle	24deg	
Color Temp.	3500K	
CRI	Ra>90	
Luminous	2941 lm	
Body	Die-cast aluminum alloy	
Body finish	N/A	
Trim finish	White	
Reflector finish	Mirror	
IP Rate	IP20	
Light source	COB module	
Input Voltage	AC220~240V	
Dimming Type	Non-Dimmable	
Certificate	CE,CCC	
Cut Hole	150	

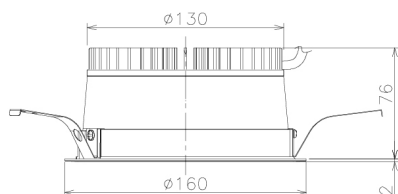

Height (Weight)	
48.5W	125 (1.4kg)
41.0W	106 (1.2kg)
28.0W	106 (1.2kg)
23.0W	76 (0.9kg)
20.0W	76 (0.9kg)

