


Item no. DD138-5020MB9030L


Series Name: Cledy spark (Shallow cone)
(DD138L)



■ Direct Horizontal Illuminance DD138-5020MB9030L

Beam Angle	Vertical Illuminance (lx)
21°	69710
22°	17430
23°	7750
24°	4360
25°	2790
26°	1940
27°	1420
28°	1090

Installation	Recessed mount	
Type	High-efficiency	Fixed
	downlight Φ 150	
Fixture wattage	48.5W	
Beam angle	22deg	
Color Temp.	3000K	
CRI	Ra>90	
Luminous	7108 lm	
Body	Die-cast aluminum alloy	
Body finish	N/A	
Trim finish	Black	
Reflector finish	Mirror	
IP Rate	IP20	
Light source	COB module	
Input Voltage	AC220~240V	
Dimming Type	Non-Dimmable	
Certificate	CE,CCC	
Cut Hole	150	

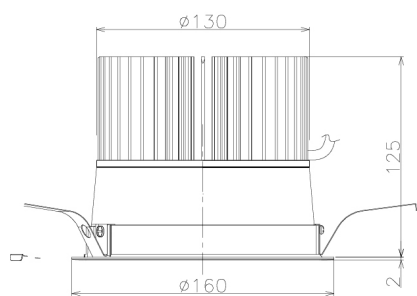

Height (Weight)	
48.5W	125 (1.4kg)
41.0W	106 (1.2kg)
28.0W	106 (1.2kg)
23.0W	76 (0.9kg)
20.0W	76 (0.9kg)

