

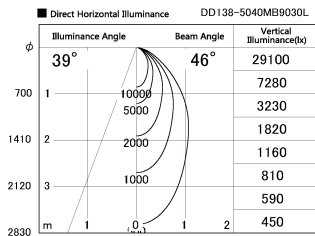

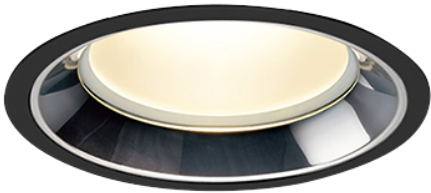


Item no. DD138-5040MB9030L

Series Name: Cledy spark (Shallow cone)
(DD138L)

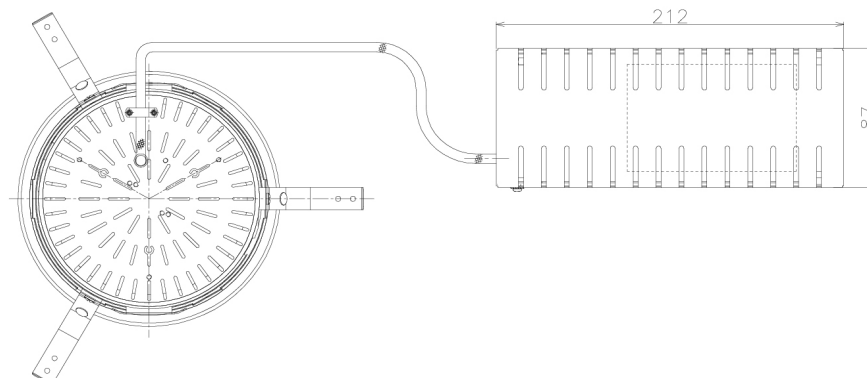

| | | |
|------------------|-------------------------|-------|
| Installation | Recessed mount | |
| Type | High-efficiency | Fixed |
| | downlight Φ 150 | |
| Fixture wattage | 48.5W | |
| Beam angle | 46deg | |
| Color Temp. | 3000K | |
| CRI | Ra>90 | |
| Luminous | 6506 lm | |
| Body | Die-cast aluminum alloy | |
| Body finish | N/A | |
| Trim finish | Black | |
| Reflector finish | Mirror | |
| IP Rate | IP20 | |
| Light source | COB module | |
| Input Voltage | AC220~240V | |
| Dimming Type | Non-Dimmable | |
| Certificate | CE,CCC | |
| Cut Hole | 150 | |

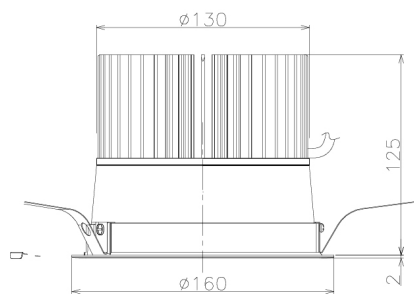

| Height (Weight) | |
|-----------------|-------------|
| 48.5W | 125 (1.4kg) |
| 41.0W | 106 (1.2kg) |
| 28.0W | 106 (1.2kg) |
| 23.0W | 76 (0.9kg) |
| 20.0W | 76 (0.9kg) |