


Item no. DD138-2530MW9040D


Series Name: Cledy spark (Deep cone)
(DD138D)



■ Direct Horizontal Illuminance DD138-2530MW9040D

Illuminance Angle	Beam Angle	Vertical Illuminance (lx)			
26°	28°	39750			
		9940			
		4420			
		2480			
		1590			
		1100			
1380	3	810			
1840	m	1	0	2	620

Installation	Recessed Mount	
Type	High-efficiency downlight Φ 150	Fixed
Fixture wattage	23W	
Beam angle	26 deg	
Color Temp.	4000K	
CRI	Ra>90	
Luminous	2785 lm	
Body	Die-cast aluminum alloy	
Body finish	White	
Trim finish	White	
Reflector finish	Mirror	
IP Rate	IP20	
Light source	COB module	
Input Voltage	AC220~240V	
Dimming Type	Non-Dimmable	
Certificate	CE,CCC	
Cut Hole	150	

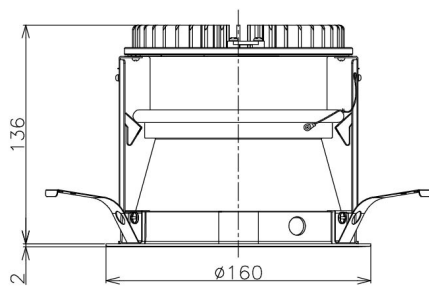

Height (Weight)	Spot / Medium / Medium flood	Wide flood
48.5W	175 (1.4kg)	
41.0W	155 (1.1kg)	
28.0W	166 (1.1kg)	155 (1.1kg)
23.0W	136 (0.9kg)	125 (0.9kg)
20.0W	136 (0.9kg)	125 (0.9kg)

