


Item no. DD138-2015MW9040D


Series Name: Cledy spark (Deep cone)
(DD138D)



■ Direct Horizontal Illuminance DD138-2015MW9040D

| φ | Illuminance Angle | Beam Angle | Vertical Illuminance (lx) |
|-----|-------------------|------------|---------------------------|
| 210 | 12° | 13° | 87640 |
| 210 | | | 21910 |
| 420 | | | 9740 |
| 420 | | | 5480 |
| 630 | | | 3510 |
| 630 | | | 2430 |
| 840 | | | 1790 |
| 840 | | | 1370 |

| | | |
|------------------|-------------------------|-------|
| Installation | Recessed Mount | |
| Type | High-efficiency | Fixed |
| | downlight Φ150 | |
| Fixture wattage | 20W | |
| Beam angle | 13 deg | |
| Color Temp. | 4000K | |
| CRI | Ra>90 | |
| Luminous | 2096 lm | |
| Body | Die-cast aluminum alloy | |
| Body finish | White | |
| Trim finish | White | |
| Reflector finish | Mirror | |
| IP Rate | IP20 | |
| Light source | COB module | |
| Input Voltage | AC220~240V | |
| Dimming Type | Non-Dimmable | |
| Certificate | CE,CCC | |
| Cut Hole | 150 | |

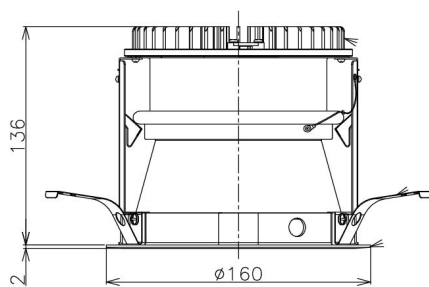

| Height (Weight) | Spot / Medium / Medium flood | Wide flood |
|-----------------|------------------------------|-------------|
| 48.5W | 175 (1.4kg) | |
| 41.0W | 155 (1.1kg) | |
| 28.0W | 166 (1.1kg) | 155 (1.1kg) |
| 23.0W | 136 (0.9kg) | 125 (0.9kg) |
| 20.0W | 136 (0.9kg) | 125 (0.9kg) |

